
P.O. Box 2456, Gardena, CA 90247-0456 310-538-9440 1-800-292-9326 Outside CA FAX: 310-715-9188


FAX 1-800-232-9326


CW-66 CW-2

CW-58A CW-16A




CW-66 — Lather CW-58A — All Purpose

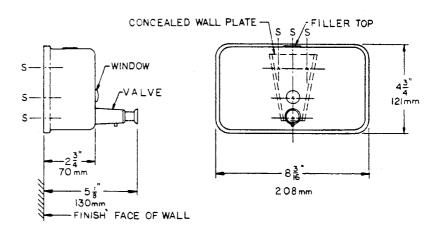



CW-2 — Lather CW-16A — All Purpose

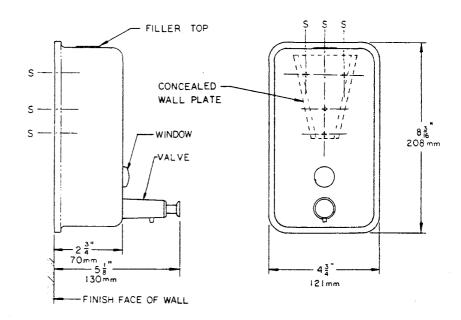

CONSTRUCTION:

BODY fabricated of type 304 (18-8), 20 gauge stainless steel with exposed surfaces in architectural satin finish.

BACK fabricated of type 304 (18-8), 20 gauge stainless steel. Heliarc welded to body.

WALL PLATE of heavy gauge stainless steel.

SOAP VALVE has chrome plated brass housing with stainless steel mechanism. Internal checks prevent leakage.

CAPACITY:

40 oz. liquid soap.

OPERATION:

Push-in valve dispenses measured amount of liquid soap with each stroke. Sight gauge indicates refill time. Filler hole

cover requires special key to open.

NOTE: Liquid and lather valves operate best with any vegetable oil or coconut oil hand soap have a 10 to 15 percent

concentration

INSTALLATION:

Secure separate mounting bracket to wall. Slide dispenser into place and secure locking screw through filler hole.